


CHIMNEY WITH EIFS INSTALLED

With the EIF System terminating at the top of the turned out flashing leg and a fillet bead of sealant applied to the flashing/EIFS interface, water is diverted around the chimney.

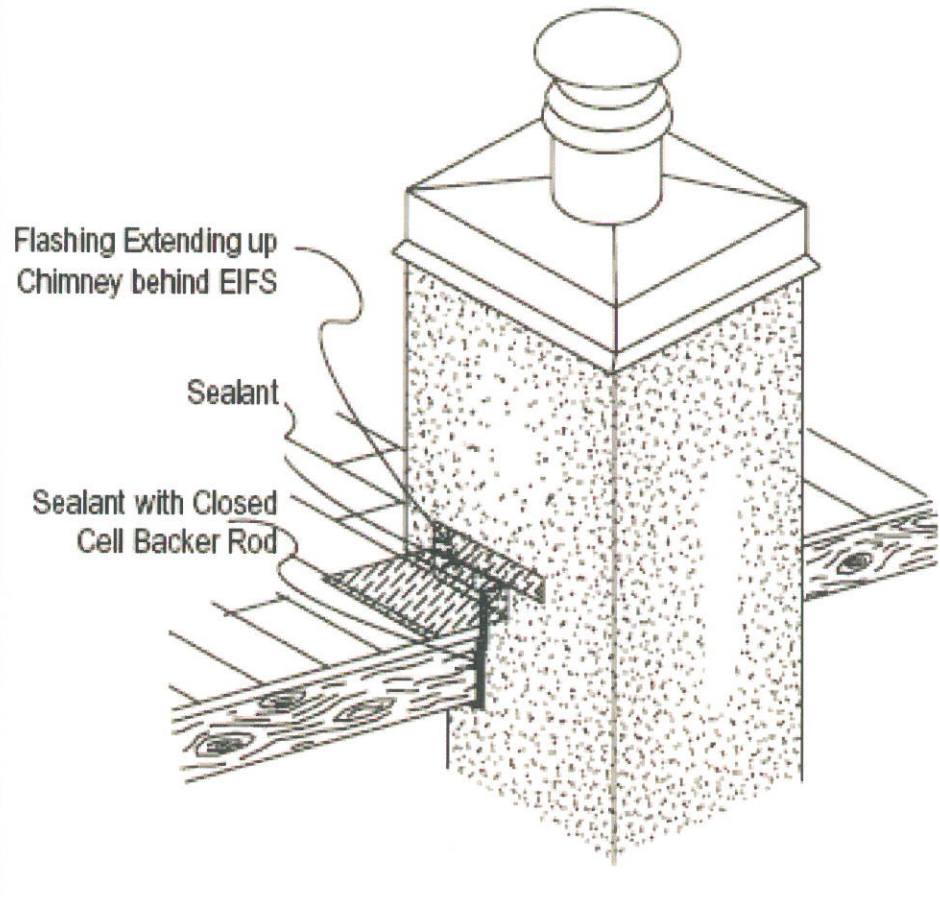

The architecture, engineering and design of the project using Bullseye products are the responsibility of the project's design professional. All systems must comply with local building codes and standards. This detail is for general information and guidance only, and Bullseye Wall Technology, Inc. specifically disclaims any liability for the use of this detail and for the architecture, design, engineering or workmanship of any project. The project design professional determines, in its sole discretion, whether this detail or a functional equivalent alternative is best suited for the project. Use of a functionally equivalent detail does not violate Bullseye's warranty. This detail is subject to change without notice. Contact Bullseye to insure you have the most recent version.

Bullseye Wall Technology,
Inc
145 Kelli Clark Court
Cartersville, GA 30121
P: 770.974.0766
F: 770.974.2974

BULLSEYE
WALL TECHNOLOGY, INC.

CHIMNEY WITH EIFS INSTALLED

SCALE: NONE

DRAWN: AUGUST 6TH, 2008
BY: K ALEXANDER

BULLSEYE CHIMNEY W/ EIFS DETAIL 1.00